



**HAHN - Elektrobau GmbH & Co. KG**  
 Bellersheimerstraße 45  
 35410 Hungen  
 Germany

phone: +49 (0) 6402/808-0  
 6402/808-0  
 fax: +49 (0) 6402/808-60  
 email: info@hahn-trafo.de

**Data sheet: BV EI 305 2800**




Size 5 a: height 29.8 mm                      2,3 VA            **ta 70/F**            BV EI 305 ...

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

- absolutely short-circuit-proof
- minimal size**
- test certifications to ENEC 10-, VDE, UL- and CSA-regulations
- vaccum encapsulated, bobbin with dual chamber windings**
- temperature class ta 40°C/F and ta 70°C/F
- high electrical safety and long service-life properties**
- individually tested with certificate
- excellent temperature fluctuation resistance properties**
- self-extinguishing cast housing and sealing material



Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 305 2800	2,3	230	1-5	12 V 192 mA	7-9	21,4

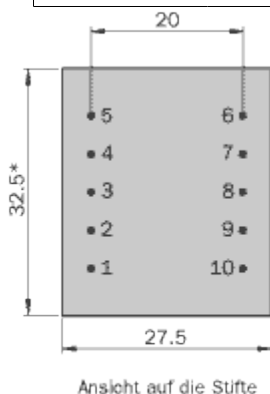

Maße ohne Toleranzangabe ± 0,3 mm,  
 Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.